



LED CONTROLLERS

ModuLED Control

Modular Constant Voltage LED Control

up to 8-Zone Wi-Fi & RF Control

ModuLED Control is the modular RF & Wi-Fi control solution for constant voltage RGB & single color LED strip. You can wirelessly control an unlimited number of LED strips in a maximum of 8 separate zones. Control options are by use of your smart-phone, tablet or with the available remote- and wall controls.

1. Choose the number of receivers needed. (min. 1 per driver)
2. Choose if you want to use a Wi-Fi interface
3. Choose your mix of controllers

Receiver



Wi-Fi / RF



Download
EasyLighting App
for IOS



Download
EasyLighting App
for Android

Controllers

RGB





Dim




ModuLED

Wi-Fi & RF Controller

up to 8-Zone




Receiver (3.10.0422)



Wi-Fi Control (3.10.0430)

Product Information	Input Voltage	12V DC	24V DC
	Max. Output Power	240W	480W
	Max. Load Current	4 * 5A	
	Channels	4	
	LED Connection	Parallel Connection	
3.10.0430	Input Voltage	12/24V DC	
	Operation Frequency	433.92MHz / 868MHz	
	Control Zones	8-zone	
	Max. RF Range	20m	

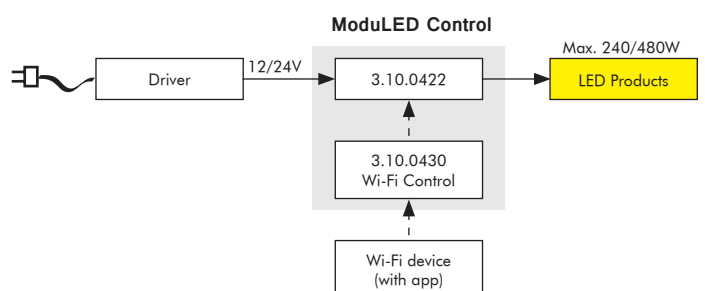

Article No.	Product Name	Product List
3.10.0422	ModuLED Control, RF 12/24V 4 channel receiver, max. 5A per channel, excl. LED driver	
3.10.0430	ModuLED Wi-Fi Control	

ModuLED RGB

RF Controller RGB

up to 8-Zone



Turn Wall (3.10.0426*)



Touch Wall (3.10.0428*)



Touch Wall (3.10.0429)





Remote (3.10.0424)




NEW Remote (3.10.0474)




Product Information	3.10.0424	Battery Type	3*AAA Battery (excluded)
		Operation Frequency	433.92MHz / 868MHz
		Control Zones	8-zone
		Accessories	Wall bracket (included)
	3.10.0474	Battery Type	CR2025 3V (included)
		Operation Frequency	433.92MHz / 868MHz
		Control Zones	1-zone
	3.10.0426	Battery Type	CR2025 3V (included)
		Operation Frequency	433.92MHz / 868MHz
		Control Zones	1-zone
	3.10.0428	Battery Type	CR2025 3V (included)
		Operation Frequency	433.92MHz / 868MHz
		Control Zones	1-zone
	3.10.0429	Input Voltage	230V
		Operation Frequency	433.92MHz / 868MHz
		Control Zones	4-zone
	Max. RF Range		20m

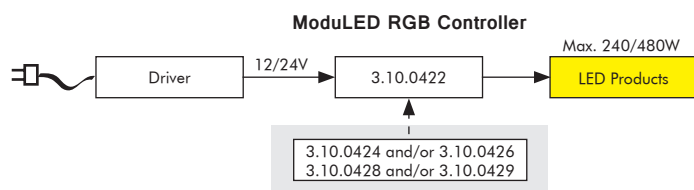


Remote (3.10.0424)




Remote (3.10.0474)



Turn Wall (3.10.0426)



Touch Wall (3.10.0428)



Touch Wall (3.10.0429)

Product List	Article No.	Product Name
	3.10.0424	Remote control RF ModuLED DIM Control, 8 zones, battery excluded
	3.10.0474	Remote control RF ModuLED RGB Control, 1 zone, battery included
	3.10.0426*	Turn wall control RF ModuLED RGB Control, 1 zone, battery included
	3.10.0428*	Touch wall control RF ModuLED RGB Control, 1 zone, battery included
	3.10.0429	Touch wall control RF ModuLED RGB Control, 4 zones, 230V

* also suitable for use in certain wall frames of the brands: Berker, Gira, Jung & Merten.

ModuLED Dim

RF Controller Single Color

up to 5-Zone




Remote (3.10.0423)




Turn Wall (3.10.0425)*



Touch Wall (3.10.0427)*

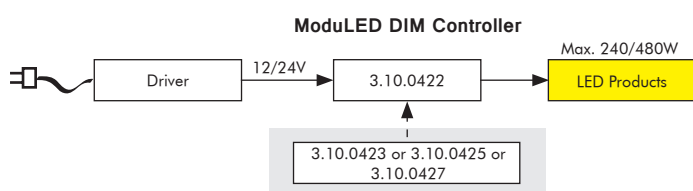

Battery Type	CR2025 3V (included)	3.10.0423	Product Information
Operation Frequency	433.92MHz / 868MHz		
Control Zones	5-zone		
Accessories	Wall bracket (included)		
Battery Type	CR2025 3V (included)	3.10.0425	
Operation Frequency	433.92MHz / 868MHz		
Control Zones	1-zone		
Battery Type	CR2025 3V (included)	3.10.0427	
Operation Frequency	433.92MHz / 868MHz		
Control Zones	1-zone		
Max. RF Range	20m		

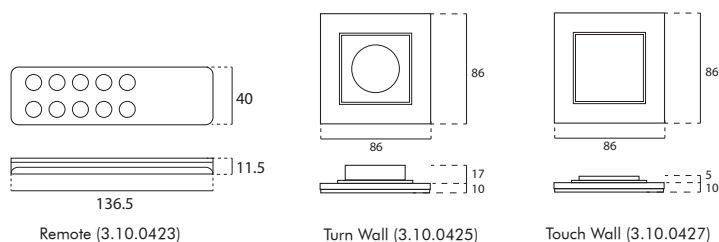


Article No.	Product Name	Product List
3.10.0423	Remote control RF ModuLED Dim Control, 5 zone, battery included	
3.10.0425*	Turn wall control RF ModuLED Dim Control, 1 zone, battery included	
3.10.0427*	Touch wall control RF ModuLED Dim Control, 1 zone, battery included	

* also suitable for use in certain wall frames of the brands: Berker, Gira, Jung & Merten.


Easy Dim

RF Dimmer

5-Zone



Input Voltage



Output Power



Signal Output




RoHS




IP 20




Product Information	3.10.0275	Battery Type	CR2025 3V (included)	
		Operation Frequency	433.92MHz / 868MHz	
		Control Zones	5-zone	
		Accessories	Wall bracket (included)	
		Max. RF Range	20m	
	3.10.0276	Input Voltage	12V DC	24V DC
		Max. Output Power	240W	480W
		Max. Load Current	4 * 5A	
		Channels	4	
		LED Connection	Parallel Connection	



Receiver (3.10.0276)



Remote (3.10.0275)


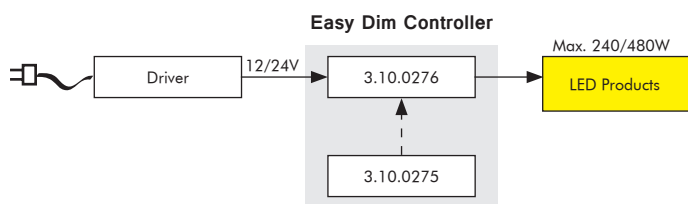


Product List	Article No.	Product Name
	3.10.0275	RF Remote Control for Easy Dim, including battery
	3.10.0276	RF Receiver Easy Dim 12/24V max. 4 channels, 5A per channel, excluding driver


Parrot

Data Repeater

4-Channel

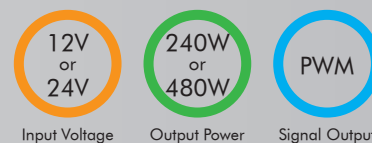

Input Voltage	12V DC	24V DC	Product Information
Max. Output Power	240W	480W	
Max. Load Current	4 * 5A		
Channels	4		
LED Connection	Parallel Connection		
Signal Output	4* PWM		

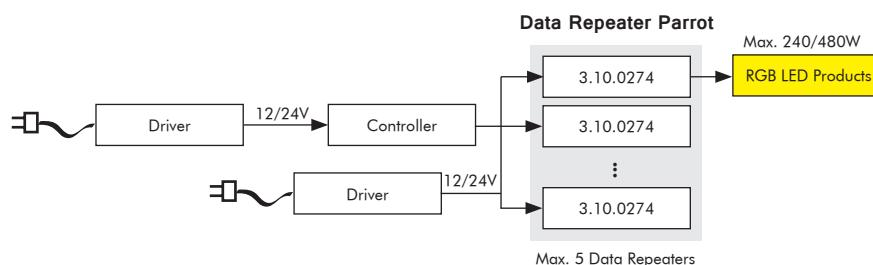


Article No.	Product Name	Product List
3.10.0274	Datarepeater Parrot 12/24V max. 4 channels, 5A per channel	

Art Touch

DMX Controller

Wall Panel



Input Voltage



Output Power



Signal Output





RoHS



IP
20



Product Information	3.10.0272	-	-	
		Input Voltage	12V / 24V DC	
		Signal Output	DMX 512	
3.10.0273		Input Voltage	12V DC	24V DC
		Max. Output Power	240W	480W
		Max. Load Current	4 * 5A	
		Channels	4	
		LED Connection	Parallel Connection	
		Signal	DMX to PWM Interface	

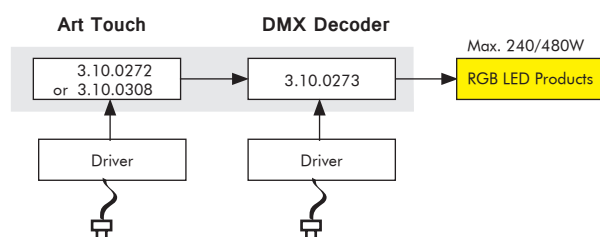
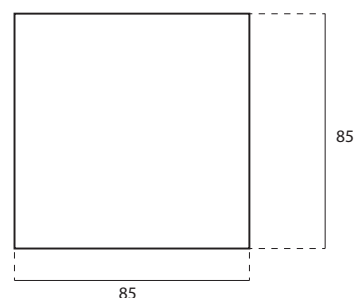


Product List	Article No.	Product Name
	3.10.0272	DMX wall panel Art Touch black, excluding driver
	3.10.0308	DMX wall panel Art Touch white, excluding driver
	3.10.0273	Lumix RGB DMX Controller Decoder 12/24V max. 4 channels, 5A per channel, excluding driver


DMX

DMX to PWM Controller

3 & 4 Channel

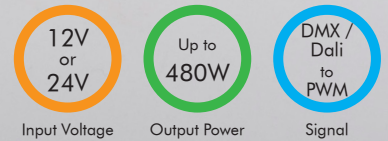

DMX Decoder (3.10.0179)




DMX Decoder (3.10.0273)

Input Voltage	12V DC	24V DC
Max. Output Power	72W	144W
Max. Load Current	3 * 2A	
Channels	3	
LED Connection	Parallel Connection	
Signal Input	DMX / DALI	
Signal Output	3 * PWM	

Product Information

Input Voltage	12V DC	24V DC
Max. Output Power	240W	480W
Max. Load Current	4 * 5A	
Channels	4	
LED Connection	Parallel Connection	
Signal Input	DMX	
Signal Output	4 * PWM	

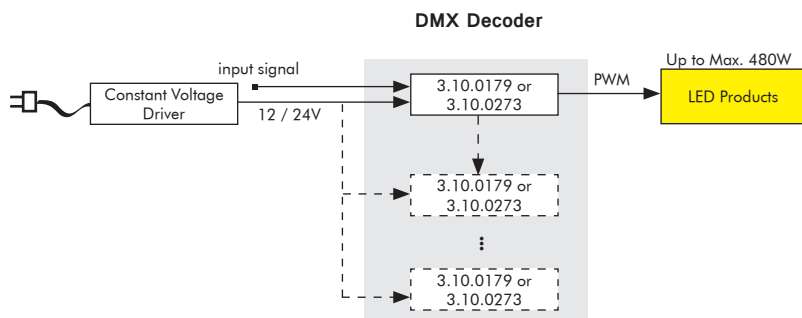


Article No.	Product Name
3.10.0179	LED DMX200 controller 24V DC 2A by channel, max.144W DMX512/DALI
3.10.0273	DMX Decoder for Lumix RGB DMX,12/24V max. 4 channels, 5A per channel, excluding driver

Product List


Controller for LupaReel AmbiLED

RF Controller

1-Zone



Input Voltage



Output Power



Signal Output





RoHS





IP 20




Product Information	Remote	Battery Type	3*AAA Battery (excluded)	
		Operation Frequency	433MHz	
		Control Zones	1-zone (no pairing option)	
		Max. RF Range	20m	
	Receiver	Input Voltage	12V DC	24V DC
		Max. Output Power	144W	288W
		Max. Load Current	2 * 6A	
		Channels	2	
		LED Connection	Parallel Connection	



Receiver



Remote

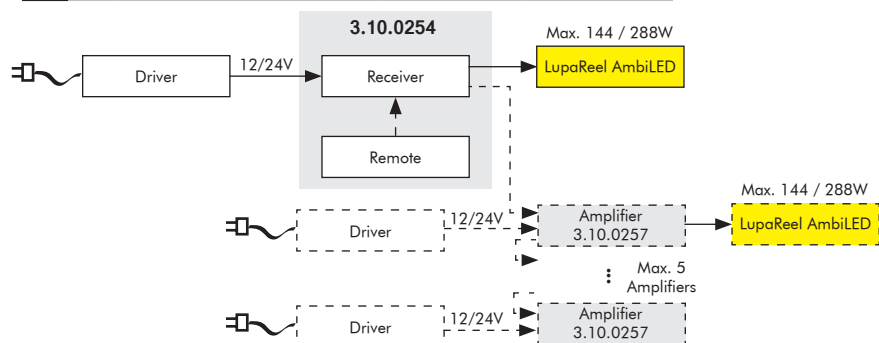




Amplifier(3.10.0257) for expanding connections

Product List	Article No.	Product Name
	3.10.0254	LupaReel 12V/24V AmbiLED RF controller excl. driver; including remote (12/24V, 144/288W)
	3.10.0257	LupaReel 12V/24V AmbiLED Amplifier max. 144W/288W (for expanding connections)



Controller for LupaReel RGB

RF Controller

1-Zone

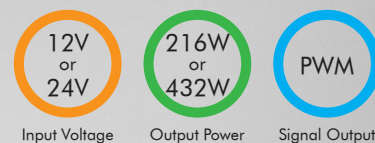

Remote




Receiver



Amplifier(3.10.0262) for expanding connections

Product Information	
Battery Type	3*AAA Battery (excluded)
Operation Frequency	433MHz
Control Zones	1-zone (no pairing option)
Max. RF Range	20m
Remote	
Input Voltage	12V DC 24V DC
Max. Output Power	216W 432W
Max. Load Current	3 * 6A
Channels	3
LED Connection	Parallel Connection
Receiver	

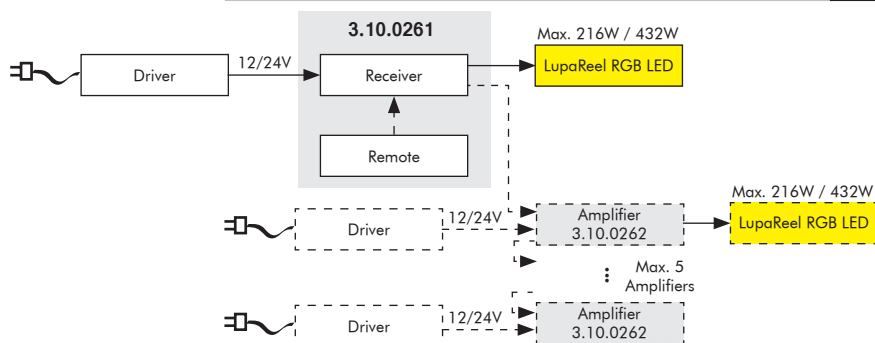

Article No.	Product Name	Product List
3.10.0261	LupaReel 12V/24V RGB RF controller excl. driver; including remote max. (12V/24V, 216/432W)	
3.10.0262	LupaReel 12V/24V RGB Amplifier max. 216W/432W	


Dim Interface

Dim Controller

Dali / 1~10 V



Input Voltage





Output Power



Signal



Product Information	Input Voltage	12V DC	24V DC
	Max. Output Power	144W	288W
	Max. Load Current	1 * 12A	
	Channels	1	
	LED Connection	Parallel Connection	
	Signal Output	PWM	

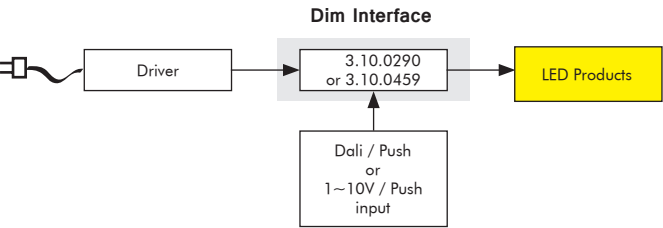
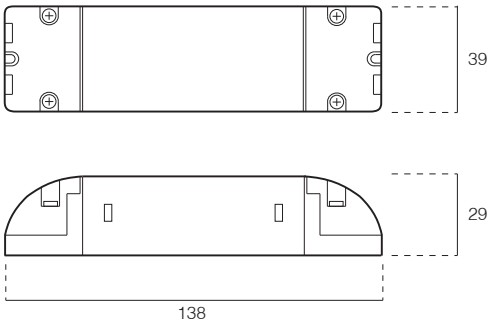


Product List	Article No.	Product Name
	3.10.0290	Dim Interface Dali & Push 12/24V max. 1 channel, 12A, excluding driver
	3.10.0459	Dim Interface 1-10V & Push 12/24V max. 1 channel, 12A, excluding driver

Fade Dimmer


Dim Controller

1~10 V

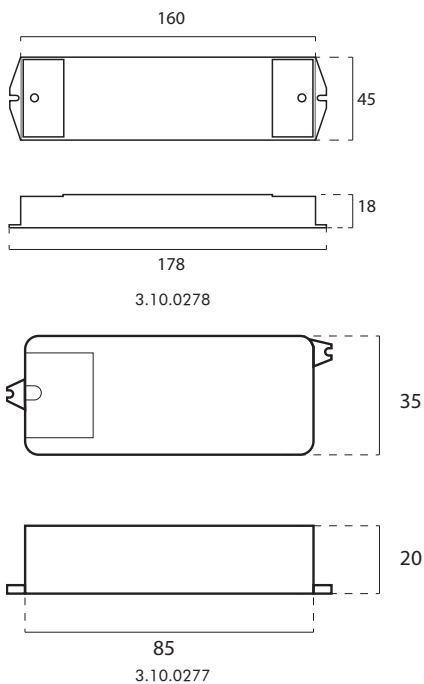

Type	3.10.0277	3.10.0278
Input Voltage	12 / 24V DC	
Channels	Max. 1	Max. 4
Max. Load Current	1 * 8A	4 * 5A
Max. Output Power	96/192W	240/480W
Dimmable with	1CH 1~10V	4CH 1~10V
Signal Output	1CH PWM	4CH PWM
LED Connection	Parallel Connection	

Product Information

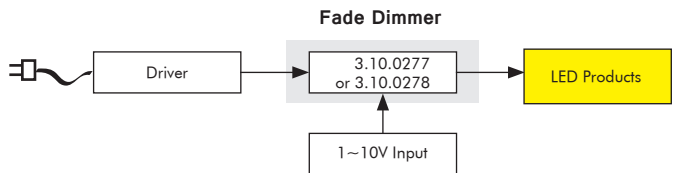

Article No.	Product Name
3.10.0277	Fade Dimmer Control 1~10V 12/24V max. 1 channel, 8A, excluding driver
3.10.0278	Fade Dimmer Control 4 * 1~10V 12/24V max. 4 channels, 5A per channel, excluding driver

Product List