



LED Downlight Performer

Version date 15-12-2016
www.opple.com


Item Code	CCT	kg
140057154	3000K	0.44kg
140057155	4000K	0.44kg
140057152	3000K	0.76kg
140057153	4000K	0.76kg
140057156	3000K	0.76kg
140057157	4000K	0.76kg
140057158	3000K	0.76kg
140057159	4000K	0.76kg
140057170	3000K	0.44kg
140057171	4000K	0.44kg
140057168	3000K	0.76kg
140057169	4000K	0.76kg
140057172	3000K	0.76kg
140057173	4000K	0.76kg
140057174	3000K	0.76kg
140057175	4000K	0.76kg

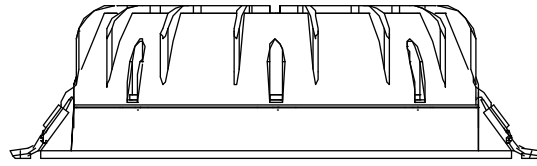


Type	A(mm)	B(mm)	C(mm)
LED DL-RC-P-HG R150-11.5W	83	483	265
LED DL-RC-P-HG R200-15W	123	543	325
LED DL-RC-P-HG R200-23W	123	543	325
LED DL-RC-P-HG R200-33W	123	543	325
LED DL-RC-P-MW R150-11.5W	83	483	265
LED DL-RC-P-MW R200-15W	123	543	325
LED DL-RC-P-MW R200-23W	123	543	325
LED DL-RC-P-MW R200-33W	123	543	325

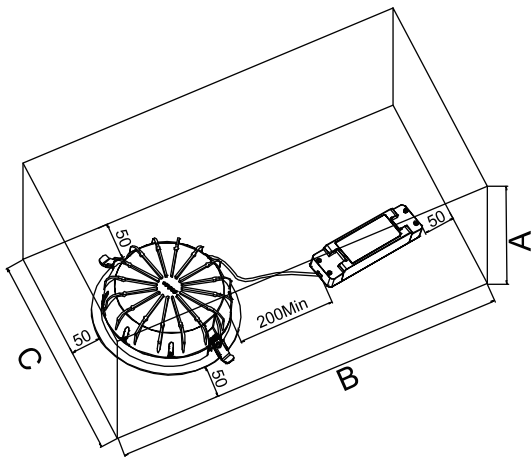



Type	H(mm)	Ø(mm)	D(mm)
LED DL-RC-P-HG R150-11.5W	58	140-150	165
LED DL-RC-P-HG R200-15W	73	200	225
LED DL-RC-P-HG R200-23W	73	200	225
LED DL-RC-P-HG R200-33W	73	200	225
LED DL-RC-P-MW R150-11.5W	58	140-150	165
LED DL-RC-P-MW R200-15W	73	200	225
LED DL-RC-P-MW R200-23W	73	200	225
LED DL-RC-P-MW R200-33W	73	200	225


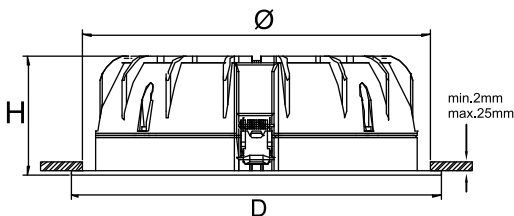


Type	Ø(mm)
LED DL-RC-P-HG R150-11.5W	140-150
LED DL-RC-P-HG R200-15W	200
LED DL-RC-P-HG R200-23W	200
LED DL-RC-P-HG R200-33W	200
LED DL-RC-P-MW R150-11.5W	140-150
LED DL-RC-P-MW R200-15W	200
LED DL-RC-P-MW R200-23W	200
LED DL-RC-P-MW R200-33W	200

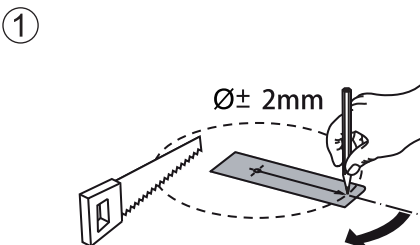

The luminaire is delivered only with lead wires.
The luminaire must be used with an outlet box
of suitable size that conform with EN60998-2-1
or EN60998-2-2 certifications.

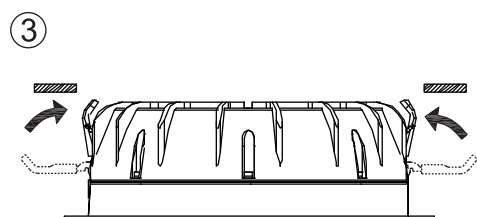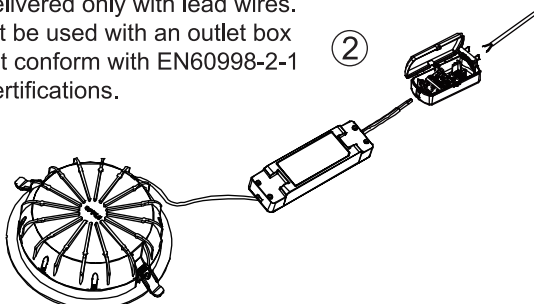

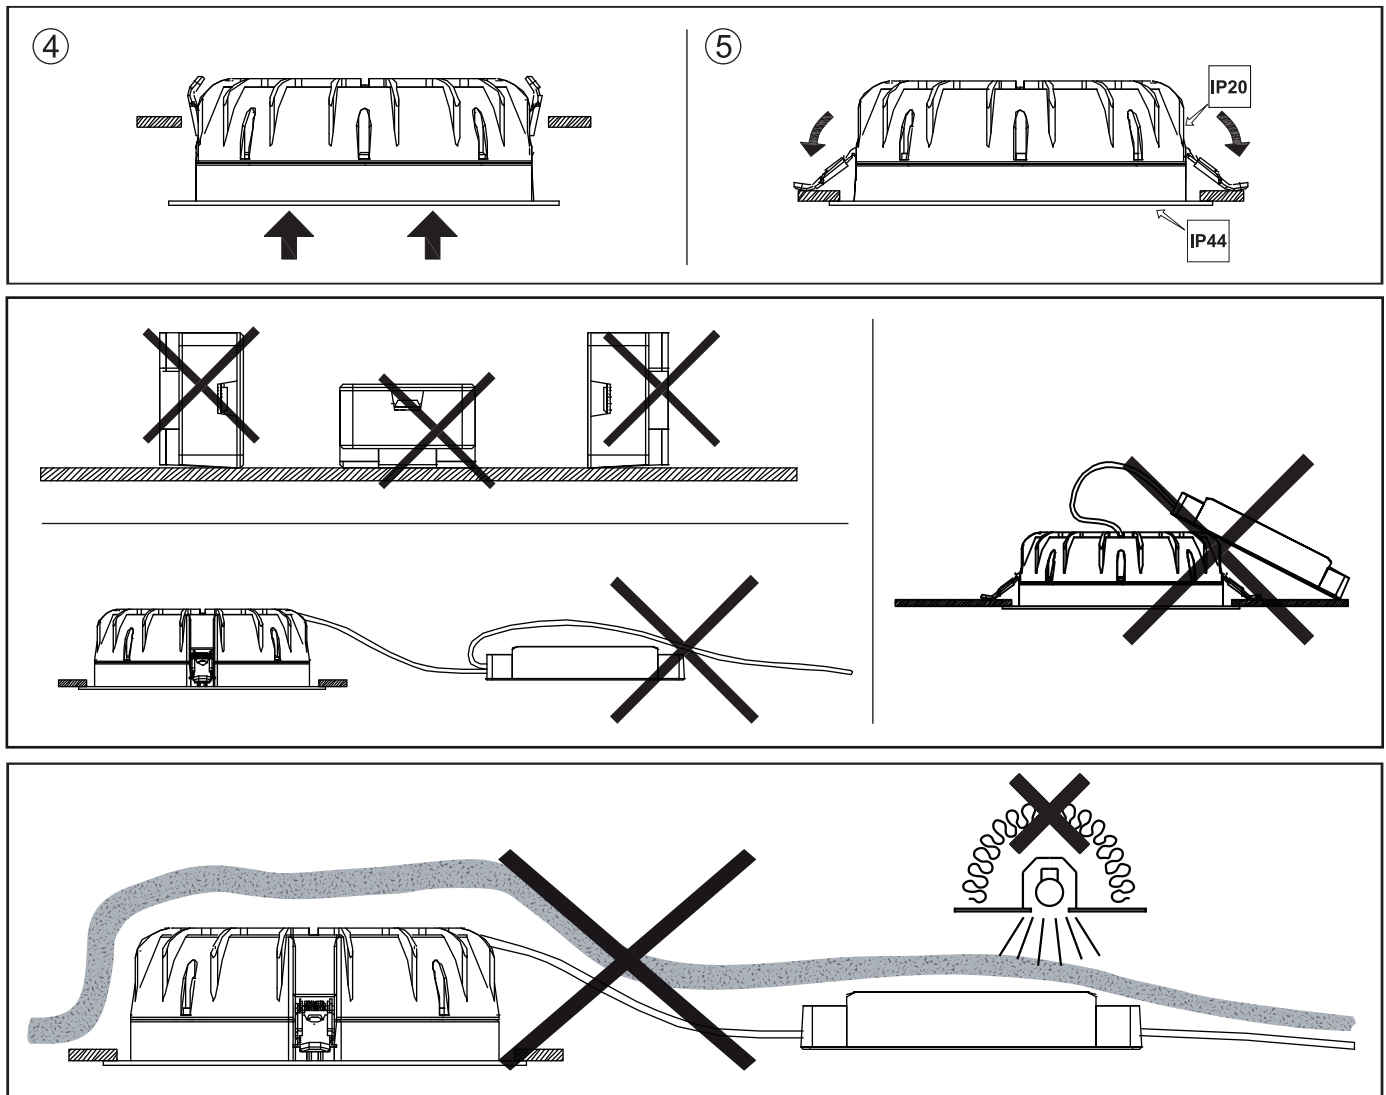

For non-user replaceable light sources.

"The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person."








Luminaires not suitable for covering with thermally insulating material.

Leuchten sind nicht mit thermisch isolierenden Materialien abzudecken.



In case of damage to the wire, it has to be replaced only by the manufacturer, distributor or by an expert, to avoid risks.

Zur Vermeidung von Risiken müssen defekte Leitungen ausschließlich vom Hersteller, Inverkehrbringer oder Fachmann ausgetauscht werden.



Opplé Lighting Electronic (Zhongshan) Co., Ltd.
Building A, No.275 Dongan Bei Road,
Haizhou District,
Guzhen Town,
Zhongshan City,
Guangdong, China.

OPPLE Lighting B.V.
Materiaalweg 6-6A
5681 RJ Best
The Netherlands
service@opple.com
www.opple.com